


## AYAKLI (B3) - ALÜMİNYUM GÖVDE

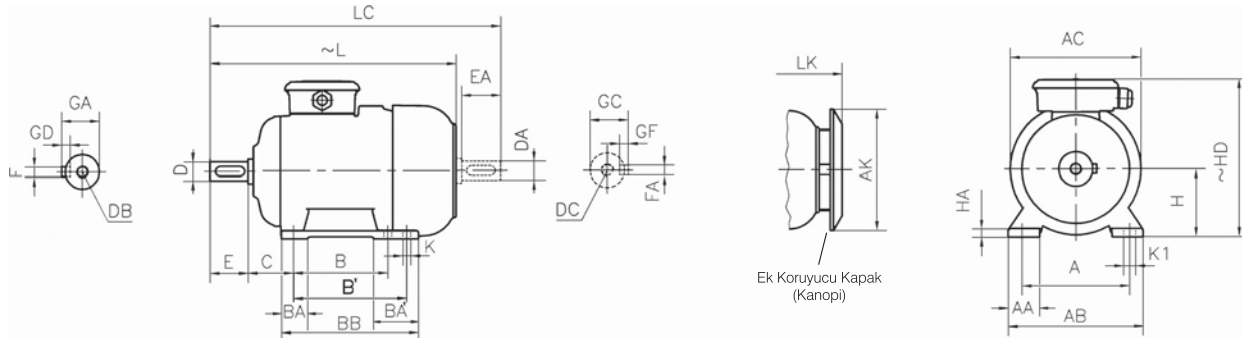

Yapı büyüklüğü	Kutup sayısı	Ayaklı motor boyutları : B3, B6, B7, B8 , B15, V5 , V6 yapı biçimlerinde																								
		H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L	LC	LK	C	E EA	DB <sup>1)</sup> DC	Ø D Ø DA	GA GC	FxGD FxGF	
56	2-4	56	152	9	90	28	112	105	-	5,8	9	71	-	24	-	87	161	185	-	36	20	M4	9	10,2	3X3	
63	2-4	63	160	10	100	31	125	121	116	7	11	80	-	27	-	103	216	243	245	40	23	M4	11	12,5	4X4	
71	2-4-6-8	71	182	10	112	33	140	138	116	7	11	90	-	27	-	108	249	284	278	45	30	M5	14	16	5X5	
80	2-4-6-8	80	198	10	125	38	160	156	151	10	15	100	-	33	-	125	279	324	308	50	40	M6	19	21,5	6X6	
90	S L	2-4-6-8	90	216	12	140	43	180	176	151	10	15	100	-	35	-	130	309	364	338	56	50	M8	24	27	8X7
			125	-	-	155	334	389	363	24																
100	L	2-4-6-8	100	234	13	160	47	200	194	189	12	18	140	-	39	-	175	376	442	413	63	60	M10	28	31	8X7
			4 <sup>2)</sup>	406	472	443	28																			
112	M	2-4-6-8	112	257	13	190	47	230	218	189	12	18	140	-	39	-	175	396	462	433	70	60	M10	28	31	8X7
			4 <sup>3)</sup>	421	487	458	28																			
132	S M	2-4-6-8	132	300	15	216	49	260	257	239	12	18	140	-	-	180	460	546	497	89	80	M12	38	41	10X8	
													178	-	46	-	218	498	584							535
160	M L	2-4-6-8	160	380	21,5	254	60	312	310	303	15	19	210	254	60	104	304	600	716	657	108	110	M16	42	45	12x8
																		644	760	701						
180	M L	2-4-6-8	180	421	24	279	68	354	348	303	15	19	241	279	57	95	320	657	773	714	121	110	M16	48	51,5	14x9
																		714	773	714						
200	L	2-4-6-8	200	477	26	318	80	398	390	370	19	24	305	-	68	-	355	747	865	803	133	110	M20	55	59	16x10
Toleranslar		-0,5																								

<sup>1)</sup>DB, DC : DIN 332-2 Form D

<sup>2)</sup>IE2 & IE3 Motor Tipi AGM2E 100 L 4b, AGM3E 100 L 4b

<sup>3)</sup>IE3 Motor Tipi AGM3E 112 M 4

<sup>4)</sup>IE2 & IE3 Motor Tipi AGM2E 132 M 6b, AGM3E 132 M 6b

<sup>5)</sup>IE2 Motor Tipi AGM2E 160 L 2, AGM2E 160 L 4

Bütün ölçüler mm birimindedir.